




Datenblatt - Fiche technique - Data sheet

21.15.0882

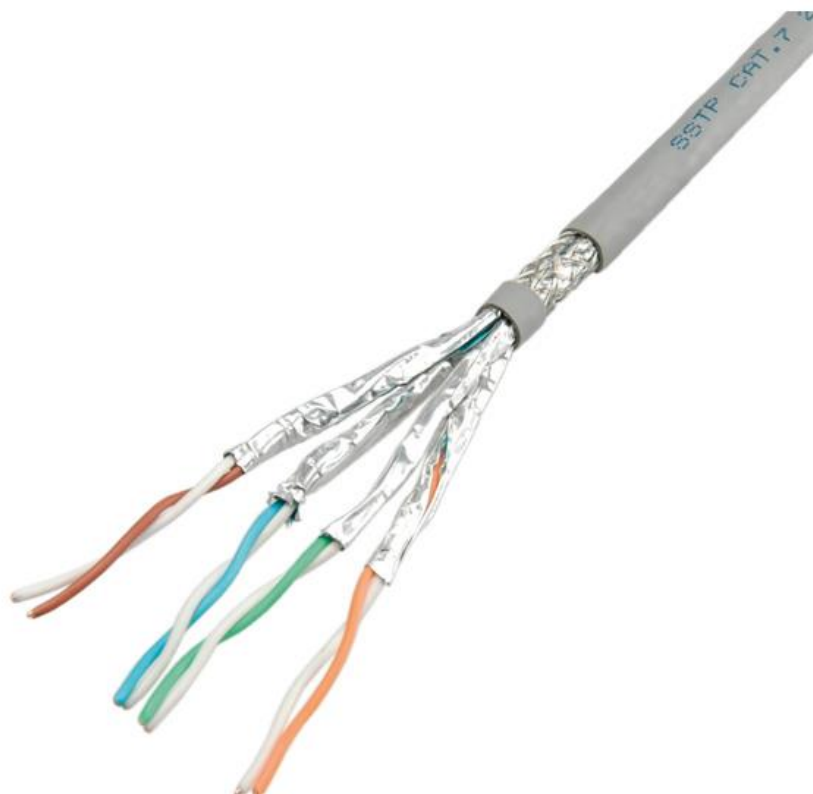


ROLINE S/FTP Kabel, Kat. 6a, Litze, 300 m


ROLINE Câble S/FTP rigide Cat.6a fils tressés, 300 m

ROLINE S/FTP Cable Cat.6a, Stranded, 300 m

SCALE 8/1

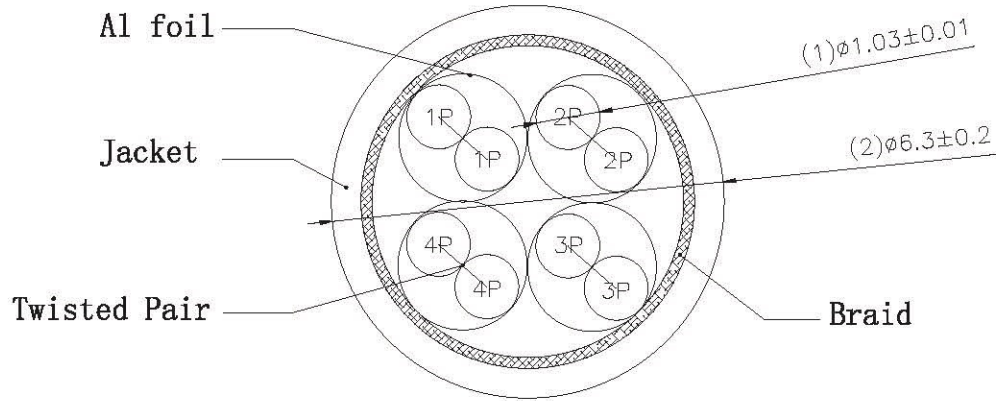

SCALE 1/2

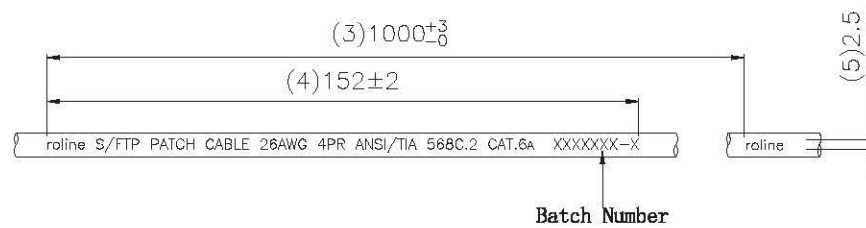

SCALE 1/1

roline S/FTP PATCH CABLE 26AWG 4PR ANSI/TIA 568C.2 CAT.6a XXXXXX-X

Specifications:

1. Wiring : T568B
2. Copper conductor : 26AWG
3. XXXXXX-X : Batch Number
4. Print legend : grey cable with blue print in
5. Jacket Material: PVC
6. Conductor OD:
 - Blue & White/Blue: 1.03 ± 0.01
 - Green & White/Green: 1.03 ± 0.01
 - Orange & White/ Orange: 1.03 ± 0.01
 - Brown & White/ Brown: 1.03 ± 0.01
7. Please add the meter printing
0001 - 0002 - 0003.....9999 at the end of patch cord if they
will be shipped as cable products
(Please be noted the printing without "M")

Item no.	21.15.0882		
Description	ROLINE Cat. 6a S/FTP LAN Cable, stranded, 300m, grey		
"#": Matching DIM.	DRAWING	19. Au1. 2014	byz
"*": Important DIM.	CHECK	19. Au1. 2014	Jane
Others General DIM.	APPROVAL	19. Au1. 2014	Frank
		DATE	NAME
GENERAL TOLERANCE OF DIMENSIONS	SCALE	1/1 (A4)	UNIT mm
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1		DRAWING NO.	
		DRAWING CLASSIFICATION	S SHEET 1 OF 1



No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER