


1 2 3 4 5 6

A


A

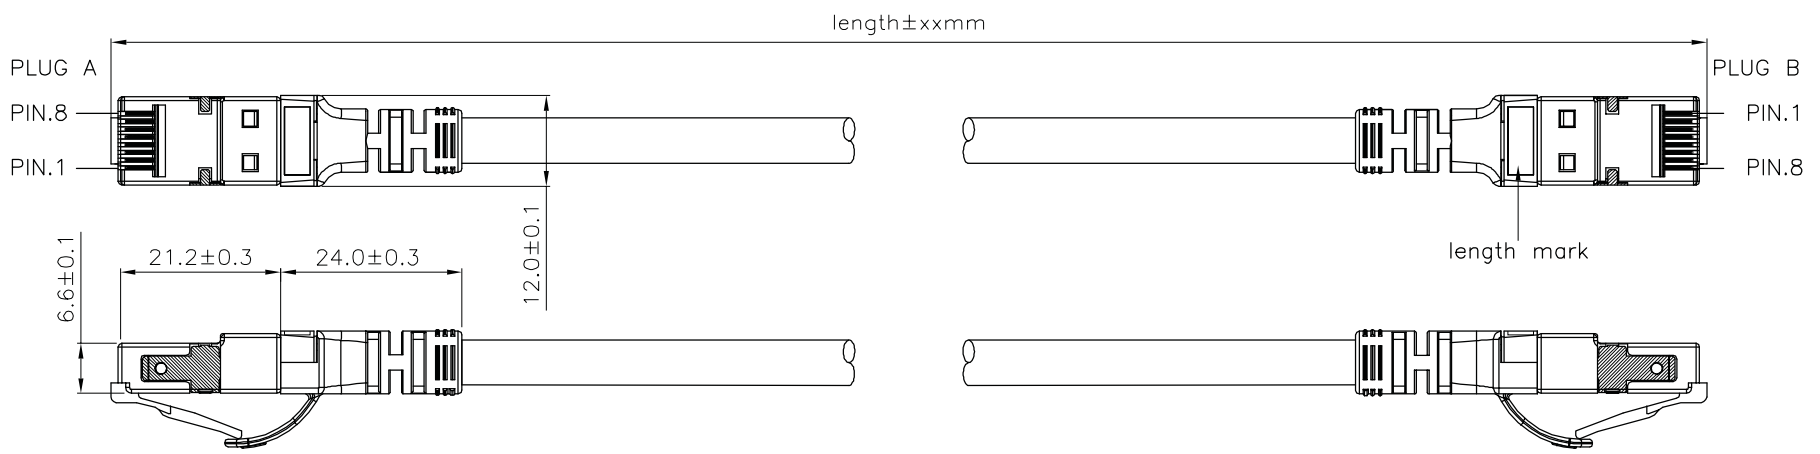

B

B

roline S/FTP PATCH CABLE 26AWG 4PR ISO/IEC 11801 & EN50288 CAT.6 LSOH XXXXXXXX-X

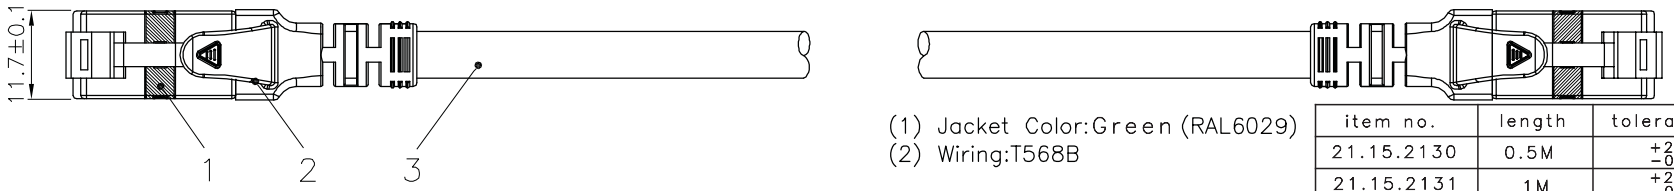

C

C

Specification :

- Material :
- RJ45 Plug : (JE P/N : PUS8850)
 - Housing : Polycarbonate, UL 94V-2, Transparent color
 - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated
 - Contact finished : Min. 50 micro-inch Gold plated on surface contact area
 - Shield : Bronze with Nickel plated
 - SR : SR-V95 FOR S/FTP Boot with nose
 - Cable :
 - Jacket : LSOH
 - Conductor : 26 AWG stranded copper
 - Isolation : PE
 - Shield : Aluminum Foil Shielded for Each Pair, copper clad with steel braid
 - Cable structure : S/FTP, 4 twisted pair
 - Minimum Banding Radius: 50mm

item no.	length	tolerance
21.15.2130	0.5M	+20 -0
21.15.2131	1M	+20 -0
21.15.2132	2M	+20 -10
21.15.2133	3M	+20 -10
21.15.2135	5M	+30 -20
21.15.2136	7M	+30 -20
21.15.2137	10M	+30 -20
21.15.2138	15M	+30 -20
21.15.2139	20M	+70 -30

D

D

item no	21.15.2130	21.15.2131	21.15.2132	21.15.2133	21.15.2135
	21.15.2136	21.15.2137	21.15.2138	21.15.2139	
Desc	ROLINE Cat 6 S/FTP Patch Cord,LSOH.Component Level,green				
"#": Matching DIM.	DRAWING	25.Aug.2015	byz		
"*": Important DIM.	CHECK	25.Aug.2015	Jane		
Others General DIM.	APPROVAL	25.Aug.2015	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS	DATE		NAME		
	SCALE	1/1 (A4)	UNIT	mm	
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING NO.				
DRAWING CLASSIFICATION		S	SHEET	1 OF 1	

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

1 2 3 4 5 6 10cm