


DVI Male (DVI-D, dual link)

DVI Male (DVI-D, dual link)

NOTE:

- 1) PRIMARY DIM: A. C. D.
- 2) DVI-DIGITAL DUAL LINK
- 3) P1&P2 DIE NO. :OH24003
- 4) ROHS & REACH COMPLIANT
- 5) 100% SHORT CIRCUIT TEST
- 6) CONDUCTION RESISTANCE:5Ω(5M ABOVE 10~20Ω)
- 7) INSULATION RESISTANCE:20MΩ
- 8) HI-POT:300V DC
- 9) SWAY TEST: PRODUCT LINE 1.5 SECONDS  
(SEMI-FINISHED PRODUCTS NOT REQUIRED)
- 10) COPPER FOIL 360° RING WELDING

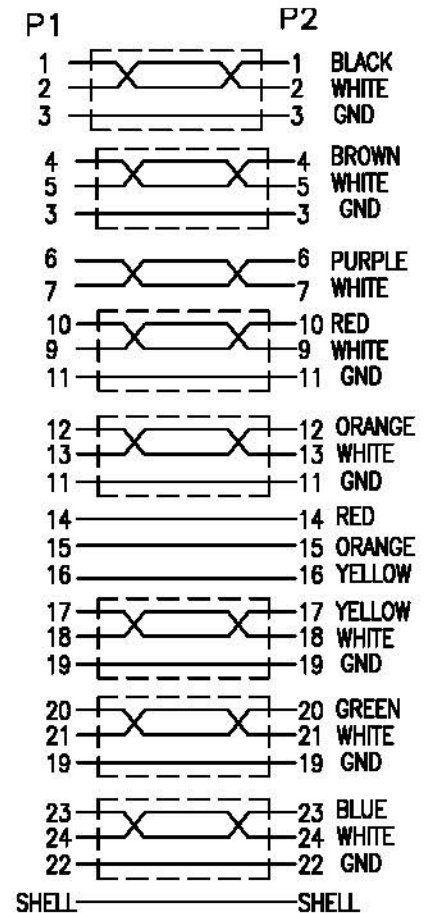

|   |  |
|---|--|
| 3 | OUTER JACKET PVC 45Pa BLACK(1101)                                  |
| 2 | DVI 24+1/M BLACK TERMINAL G/F 1U" NICKEL PLATED SHELL              |
| 1 | UL20276(28#1P+A+D)*7+28#1P+28#3C+A+B(128AM)+D OD:8.6MM BLACK(1101) |

**SECOMP**

|   |                                  |
|---|----------------------------------|
| Item no.  | 11.04.5556                       |
| ROLINE DVI Cable, Dual Link<br>M/M, 7.5m, black |                                  |
| DR.   | SAN 2015/06/16                   |
| SCALE   | SHEET 1/1 UNIT MM SIZE A4 REV. A |