


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

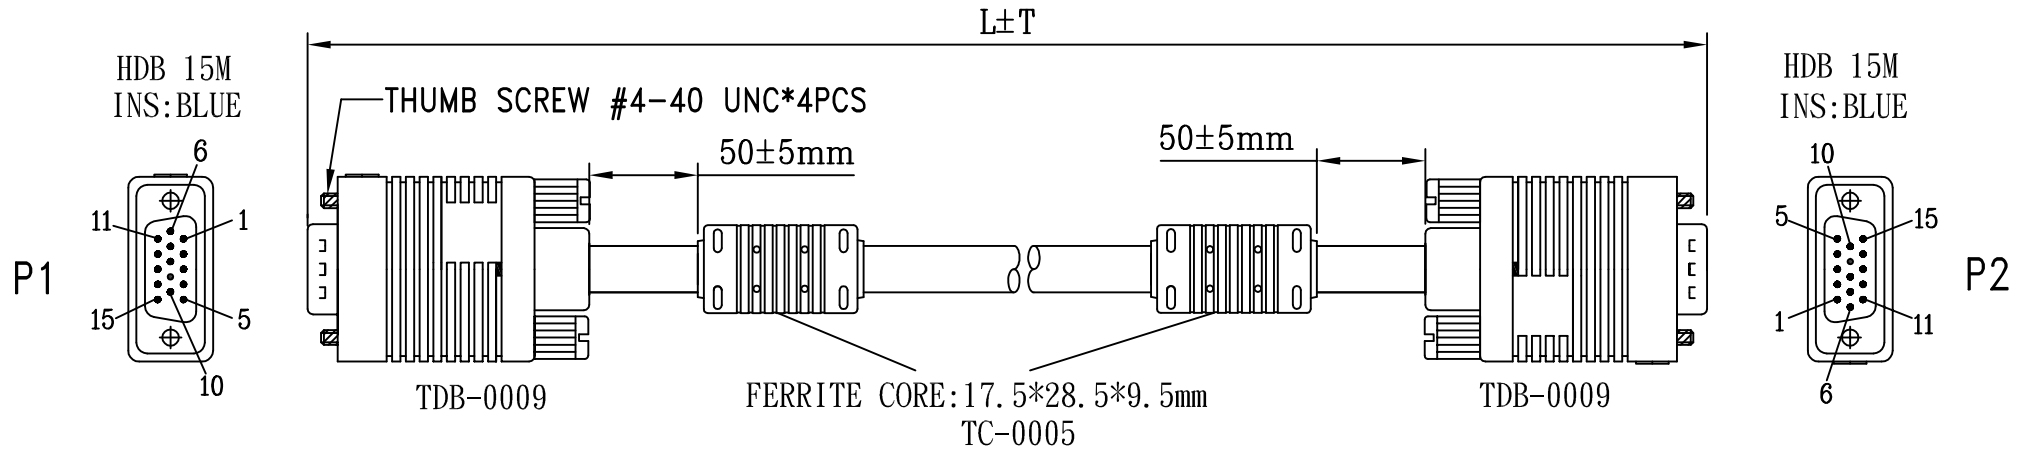

NOTE:

- CABLE:UL-2919 28AWG(7/0.127 T.C)*3COAX(75 OHMS)
+24AWG(7/0.20 T.C)*9C+AL/MY+D.W+BRAID(85%)
PVC JACKET, COLOR:BLACK(NK-K01) OD: $\varnothing 8.5 \pm 0.15$ mm, (C2919355-1)
(SPACE SHUTTLE)
- CONNECTOR:
P1&P2:HDB15P MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL
- SHIELD:COPPER-FOIL 360°SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
- ELECTRICAL TEST: <1>.100% OPEN SHORT & MIS WIRE TEST
<2>.CONTACT RESISTANCE 3 Ohms MAX
<3>.INSULATION RESISTANCE 10M Ohms MIN
- PACKING:<1>EACH PC / POLYBAG + BIG HEADER CARD + BAR CODE LABEL.
<2>EACH PC / POLYBAG + BAR CODE LABEL.

PIN OUT

P1	P2	P1	P2
1	1	10	10
6	6	11	11
2	2	12	12
7	7	13	13
3	3	14	14
8	8	15	15
4	4	SHELL	BRAID
5	5	CENTER	
9	9	SHIELDING	

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Rotronic co., LTD.

Title
HDB15/M-HDB15/M W/FERRITE CORES CABLE

Customer P/N

Draw FANNIE 09/24/10'	App'd	Customer	T-RAG
Chek	Scale	NONE	Units
Engr	m/m	Third Angle Projection	
Dwg No.	120-3272	REV:A	Sheet 1/1

120-3272-3	11.04.5670	20000±200	7611990192267	<2>	7611990992263
120-3272-2	11.04.5660	10000±100	7611990192250	<2>	7611990992256
120-3272-1	11.04.5653	3000±30	7611990192243	<1>	7611990992249
DWG	P/N	L±T(mm)	BAR CODE NO.	PACKING	CTN BAR CODE