


Item No.	Length
S3675	L=1m ± 15mm
S3676	L=2m ± 15mm
S3677	L=3m ± 15mm

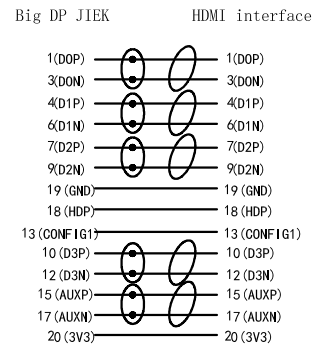

Note: DP TO HDMI real machine detection

1. Signal source resolution UXGA: 1920 X 1080P
2. Refresh rate: 60HZ
3. The video shows no signal jitter, abnormal display such as smear, ghosting, and lack of color
4. The total length of the two ends of the test extension cable is 1000MM / MAX
5. Temperature resistance: 40-70 degrees Celsius

Version	ECN number	Description	Date	Changer
		TOLERANCE INCHES M/M 		
.X	.015	.030	Item No.: S3675, S3676, S3677	
.XX	.010	.010	Description: STANDARD Cable	
.XXX	.005	.05	DisplayPort, DP-HDTV, M/M Black	
DRAWN BY	Peter	CUSTOMER:		
CHECK BY	Keven	CUSTOMER NO.:		
APPD BY		SCALE	NONE	REV.
		UNIT	MM	A
		DATE	2022. 9. 27	1/1

4	IC model: PTN3361	1	SET
3	Interface information: HDMI, male connector, 20PIN gold plated. Gold-plated appearance, ABS version shell.	1	SET
2	Interface information: DP 20PIN, male connector, 20PIN pin, gold plated. Gold-plated appearance, black rubber core, ABS version shell, with hook, black.	1	SET
1	Wire model: CABLE 32#BC (2C+AL) * 4P + 32# BC * 6C + A	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TYUN IT	