

USB to RJ-45 (RS-232) Console Adapter UC232B

The ATEN UC232B is a one port USB-to-Serial console adapter. This high quality industrial adapter cable is designed to instantly add single RS-232 console port connectivity for networking appliances via a USB port. The adapter is powered via the USB connection.

The UC232B is compatible with the USB 2.0 standard and works conveniently with desktops and laptops. It also can be used with large integrated computer-based systems or other specialized applications, such as point-of-sale applications, networking equipment, industrial automation systems, and native serial transfer instruments to offer a convenient connectivity solution. The UC232B converter provides a plug & play solution. Windows, Mac and Linux drivers are included.








Features

- Converts a USB port to RJ-45 Console port (RS-232)
- Supports straight RJ-45 cables; no need to use Rolled RJ-45 cables for connecting Networking Routers / modems / network switches for configuration
- Fast COM port Transmission up to 921.6 Kbps data transfer rate
- COM retention saves the assigned port settings for the device
- Proven performance in anti-electromagnetic interference (anti-EMI) capability for stable transmission performance
- OS Compatibility: Windows, Mac, and Linux
- Plug-and-Play
- No external power supply needed
- A trustworthy connectivity solution recommended and adopted by leading enterprises worldwide

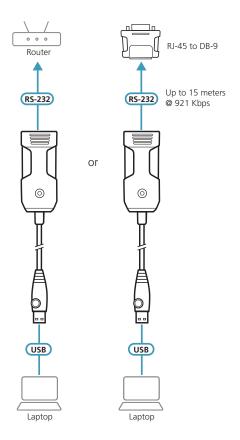

Specifications

	UC232B
Connectors	
USB Port	1 x USB Type-A Male (White)
Serial	1 x RJ-45 Female (Sliver)
Data Rate	Up to 921.6Kbps
Cable Length	1.2m
LEDs	Power Status
Power Mode	Bus Powered
USB Specification	USB compliant
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 − 60 °C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.06 kg
Dimensions (L x W x H)	2.56 x 5.84 x 2.23 cm

Product information is subject to change without prior notice.

Released: 06/2024 V3.0

© Copyright 2024 ATEN® International Co. Ltd.
ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.

