



## INLINE® DISPLAYPORT TO HDMI AOC CONVERTER CABLE, 4K/60HZ


**DisplayPort 1.2 male to HDMI 2.0b A male hybrid cable, hybrid active optical cable (AOC)**

- DP 1.2 standard
- Source: DisplayPort male plug with interlock
- Display: HDMI A male plug
- Plug and Play - no drivers needed
- Gold plated contacts
- Metal housing plugs
- AOC-cable: Converts electrical data signals to optical signals
- 4 cores OM3 multimode fiber (high speed data) & 7 wired copper (power and low speed data)
- Round cable black PVC jacket, OD: 5.2 mm
- Bending radius > 20 mm
- Bandwith up to 18 Gb/s
- Supports resolutions up to 3840x2160@60Hz  
4096x2160@60Hz / 4:4:4
- Integrated HDMI Ethernet Channel (HEC) for Network data transfer up to 100 Mb/s
- Supports 3D / HDCP2.2 / EDID / ARC / CEC
- HDR is not supported
- Operation temperature: 0°C - +50°C
- Storage temperature: -20°C - +70°C



Art. Nr.	Length	EAN
17180A	10 m	4043718303939
17180B	15 m	4043718303946
17180C	20 m	4043718303953
17180D	25 m	4043718303960
17180F	50 m	4043718303977

## INLINE® DISPLAYPORT TO HDMI AOC CONVERTER CABLE, 4K/60HZ

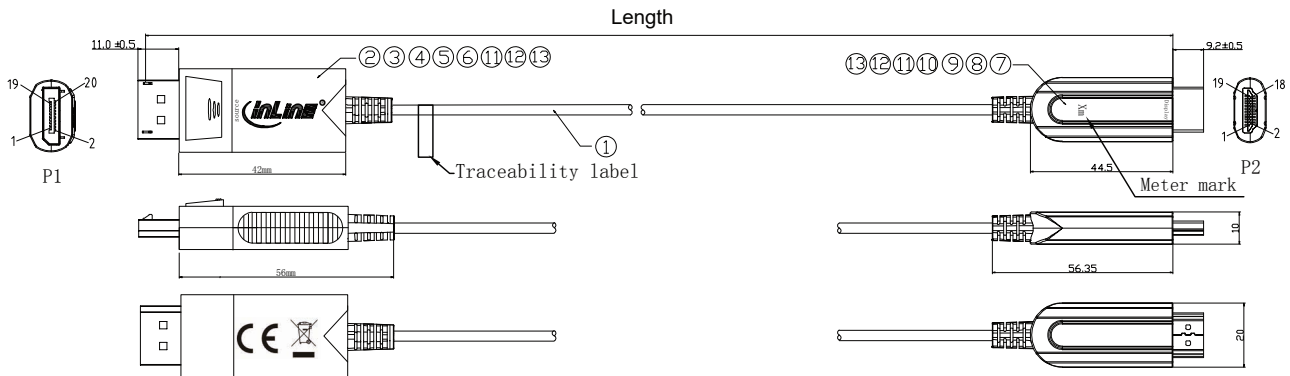

- Bandwith up to 18 Gbps
- 3840×2160@60Hz 4096×2160@60Hz resolution 4:4:4
- Integrated HDMI Ethernet Channel(HEC) for Network data transfer up to 100Mbit/s
- Supports 3D/HDCP2.2/EDID/ARC/CEC
- HDR is not supported
- Round cable Black PVC jacket OD:4.5mm±0.10
- Operation temperature : 0°C - +50°C
- Storage temperature : -20°C - +70°C
- ROHS 2.0 and REACH compliant
- CE EMC certificate

