rotronic

Datenblatt - Fiche technique - Data sheet 19.06.1048




Universal Crimpzange für Modular Plugs,

Pince à sertir univ. pour fiches modulaires,

Universal Crimping Tool for Modular Plugs,

19.06.1048

Professional Modular Crimping Tool

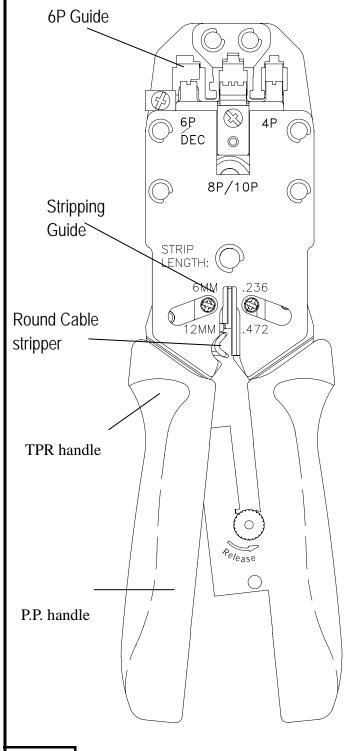

Specification:

| Item No. | Ratchet Type | For Crimping Modular Plug |
|------------|-----------------|---|
| 19.06.1048 | With Ratchet | 8P8C/RJ45, 6P6C/RJ-12, 6P4C/RJ-11, 4P4C & 4P2C Plugs DEC/Off Set Plug-6P6C |

* Length : 8.3" (210±3mm)

* Weight: 510g

* **Material**: Frame-Made Of Middle Carbon Steel.


* **Finished**: Black Oxide Finished And

Hardened.

08/10/06 Jullie

19.06.1048 User Manual

Cuts, strips and crimps all kinds of modular plug without changing modular die set.

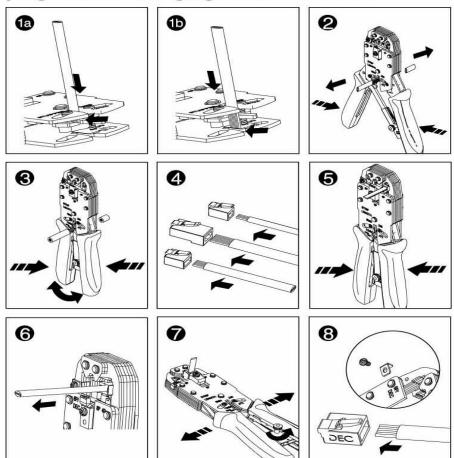

Instructions

Non-Ratchet Type: Remove the closed lock to open the handles. Ratchet Type: Squeeze handles until it stops to open the handles.

- 1. Insert cable between stripper blades.
 - 1a.Insert 4P or 6P cable from the top end of the stripper black until it touches the stop guide (stripping length 6mm)
 - 1b.Insert 8P cable between stripper blades and let it extend a little past the lower cutter blade.
- 2. Squeeze handles, cable must be kept perpendicular and then pull from the tool.
- 3. Round cable stripping:
 - Insert round cable between the round cable stripper blades, squeeze handles and rotate cable and handles.
- Remove the outer jacket insert the stripped cable into the plug make sure the left wire at one end matches the right wire at the other end.
- Place modular plug with cable into the tool's holder. Make sure the stripped wire is between the tab and gold contacts. Squeeze handles until it stops.
- 6. Remove the crimped plug from the tool.
- 7. During the crimping process, you may turn the screw on the ratchet in counterclockwise direction to stop the incorrect operation. (RATCHET RELEASED)
- 8. To crimp "DEC" plug, follow step 1 to step 3.

 Remove the screw on the left side of the 6P holder, insert the "DEC" plug and cable into the 6P holder and squeeze handles till it stops.