



N150 Wireless ADSL 2+ Modem Router

TEW-721BRM (v1.0R)

- Combination high speed modem and wireless N150 router
- Compatible with ADSL 2/2+ ISP networks
- Pre-encrypted wireless for your convenience
- Wireless on/off button
- Four Ethernet ports for wired devices

TRENDnet's N150 Wireless ADSL 2+ Modem Router, model TEW-721BRM, is a combination high performance modem for Internet access and reliable wireless N150 router—well suited for small to medium size homes. The modem is compatible with most ADSL Internet service provider networks and it comes with an intuitive guided setup wizard. For your convenience the wireless network is setup and pre-encrypted out of the box.

Features



Easy Setup

Get up and running in minutes with the intuitive guided setup



Internet Service

Compatible with most ADSL 2/2+ internet service provider networks



N150 Wireless

Reliable 150 Mbps Wireless N



Pre-Encrypted Wireless

For your convenience the wireless network arrives pre-encrypted with its own unique password



Guest Network

Create an isolated network for guest internet access only



Wireless On/Off Button

Enable or disable the wireless network with the convenient on/off wireless button



One Touch Connection

Connect to the router at the touch of the Wi-Fi Protected Setup (WPS) button



Parental Controls

Control access to specific websites and manage which devices can access the router



Advanced QoS

Classify and prioritize different types of data such as video and audio transmissions



Energy Savings

Embedded GREENnet technology reduces power consumption by up to 50%



Ethernet Ports


Four Ethernet ports to hardwire devices



IPv6

IPv6 network support

Networking Solution

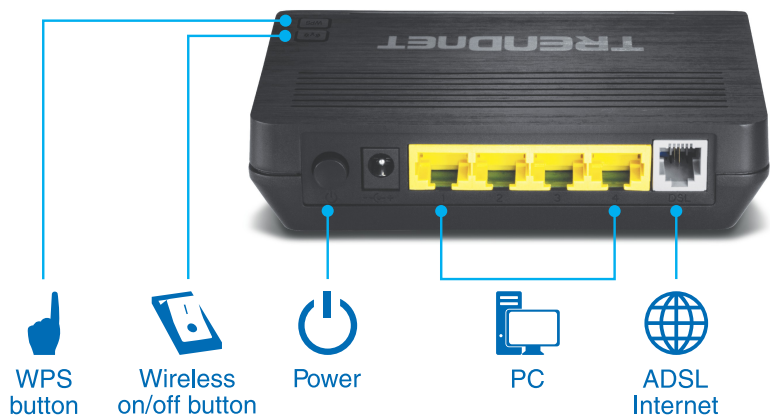

Specifications

ADSL Line Interface

- ADSL: ANSI T1.413 Issue2, G.992.1 (G.dmt, Annex A, and Annex B), G.992.2 (G.lite)
- ADSL2: G.992.3 (G.dmt.bis, Annex I, Annex J, and Annex L)
- ADSL2+: G.992.5 (Annex L and Annex M)

Standards

- IEEE 802.3
- IEEE 802.3x
- IEEE 802.3u
- IEEE 802.3az
- IEEE 802.11b
- IEEE 802.11g
- Based on IEEE 802.11n technology (up to 150 Mbps)

Hardware Interface

- 4 x 10/100 Mbps LAN ports
- 1 x RJ-11 WAN port
- WPS button/reset button
- Wi-Fi on/off button
- Power on/off button
- LED indicators
- Mounting points

Special Features

- Dynamic DNS support for dyn.com, no-ip.com, and easydns.com
- Pre-encrypted wireless network
- Up to 4 SSIDs
- TR-069, TR-064, TR-098, TR-111, and TR-143 remote management support
- Port based flow control
- Port mapping
- Spanning Tree support
- LLNMR
- Energy saving GREENnet technology

Access Control

- Wireless encryption: WEP, WPA/WPA2-PSK, WPA/WPA2-RADIUS
- Firewall: NAT, ALG, Port Trigger, SPI, Virtual Server, Special Applications, DMZ Host, PPTP/L2TP/IPsec VPN Passthrough, Multicast Passthrough, IGMP, MLD, allow/deny ping request from internet

- SNMP v1 and v2c
- Parental (Access) Controls: MAC, URL, IP Filter, domain blocking
- DoS protection
- Packet filter

Quality of Service

- WMM
- DCSP
- WFQ
- SP

Internet Connection Types

- PPPoE (RFC-2516 Dynamic IP/Static IP)
- PPPoA (RFC-2364 Dynamic IP/Static IP)
- IPoA (RFC-1483 Routed)
- Dynamic IP (IPoEoA/MER with DHCP)
- Static IP
- Bridge Mode (RFC-1483 Bridged)
- CIP (RFC-1577 Classic IP/ARP over ATM)
- IPv6 (Static, Auto-configuration (SLAAC/DHCPv6), PPPoE, IPv6 in IPv4 tunnel, 6to4, 6rd)

Management/Monitoring

- Local/remote web based management
- Remote management (HTTP, CLI, FTPD, HTTPS)
- TR-069 Remote management
- Upgrade firmware
- Backup/restore configuration
- Logging – internal/syslog/email
- Reboot
- Restore to factory defaults
- Ping test
- ATM F4/F5 Loopback Diagnostics
- Traffic meter

Routing

- Static
- Dynamic (RIP v1/2)

Frequency

- 2.412 - 2.484 GHz

Modulation

- 802.11b: CCK (11 Mbps & 5.5 Mbps), DQPSK (2 Mbps), DBPSK (1 Mbps)
- 802.11g: OFDM with BPSK, QPSK and 16/64-QAM

- 802.11n: BPSK, QPSK, 16-QAM, 64-QAM with OFDM

Media Access Protocol

- CSMA/CA with ACK

Antenna Gain

- 2 x 4 dBi internal

Wireless Output Power/Receiving Sensitivity

- 802.11b: 15 dBm (max.)/-70 dBm (typical) @ 11 Mbps
- 802.11g: 15 dBm (max.)/-65 dBm (typical) @ 54 Mbps
- 802.11n: 15 dBm (max.)/-64 dBm (typical) @ 150 Mbps

Wireless Channels

- FCC: 1-11
- ETSI: 1-13

Power

- Input: 100 – 240 V AC, 50 - 60 Hz, 0.5 A
- Output: 12 V DC, 0.5 A external power adapter
- Consumption: 4 Watts (max.)

Operating Temperature

- 0 – 40 °C (32 – 104 °F)

Operating Humidity

- Max. 95% non-condensing

Certifications

- CE
- FCC

Dimensions

- 126 x 109 x 25 mm (4.9 x 4.3 x 1 in.)

Weight

- 158 g (5.5 oz.)

Warranty

- 3 year limited

Package Contents

- TEW-721BRM
- Multi-Language Quick Installation Guide
- CD-ROM (User's Guide)
- Network cable (1.5 m/5 ft.)
- Power adapter (12 V DC, 0.5 A)

*Maximum wireless signal rates are referenced from IEEE 802.11 theoretical specifications. Actual data throughput and coverage will vary depending on interference, network traffic, building materials and other conditions.

