


Note:  
 ROHS 2.0 & REACH Compliant  
 Test:  
 Grade Designation: Each to Reference

Type	Multi-Mode	
	MPO/PC	LC/UPC
Insertion Loss	≤0.35dB	≤0.15dB
Return Loss	≥20dB	≥25dB
Test Wavelength	850nm	850nm

⑱	LC Dust Cap White	12	
⑰	LC/UPC MM Ferrule $\phi$ 126-128um	12	
⑯	LC MM Connector Beige	12	
⑮	LC Beige Clip	6	
⑬	LC 2.0 Boot White	12	
⑭	Heat Shrink Tubing Yellow	6	
⑫	Heat Shrink Tubing White	6	
⑪	Ring 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12	12	
⑩	Fiber Optical Cable OM4 Erika Violet LSZH $\phi$ 2.0mm	12*0.6m	
⑨	Heat Shrink Tubing Fanout Black	1	
⑧	12C $\phi$ 4.5mm Round cable, OM4 50/125, LSZH, Erika Violet	2m	
⑦	Heat Shrink Tubing Black	50mm	
⑥	12C $\phi$ 3.0mm Round cable, OM4 50/125, LSZH, Erika Violet	L	
⑤	MPO Black Boot 3.0mm	1	
④	Aqua Housing (SENKO)	1	
③	Black Plastic Body (SENKO)	1	
②	MPO PC MM Male Resin Ferrule (SENKO)	1	
①	MPO Black Dust Cover (SENKO)	1	
NO	SPECIFICATION STANDARD	QT'Y	REMARK

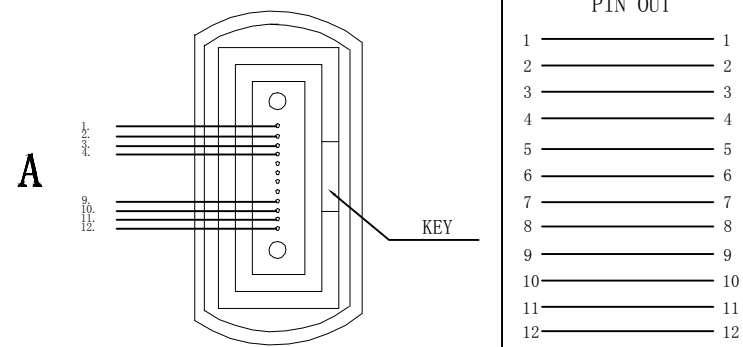

21.99.1100	VALUE MPO FanOut Cable, MPO/12xLC, OM4, 2m
ITEM NO.	Product description

**SECOMP**

		NEW	2019-1-15	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.