
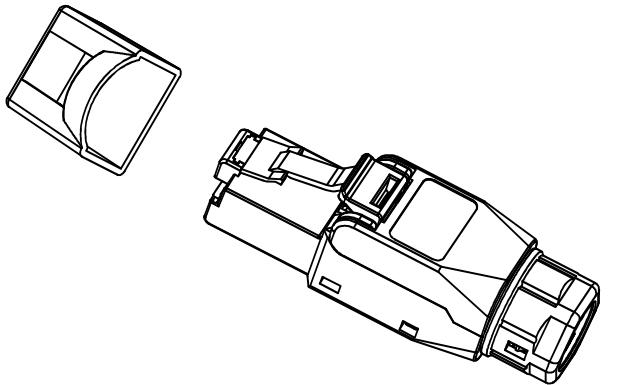
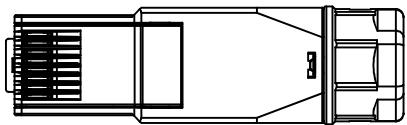
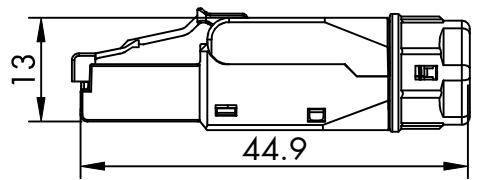


CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A			

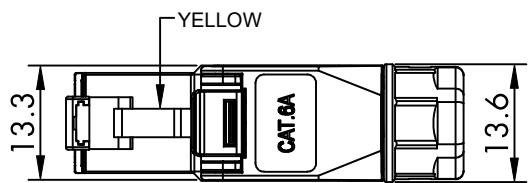

NOTE:

1. Electronic test  
 1.1 Open/short 100% test  
 1.2 Contact resistance: 20mΩ MAX.  
 1.3 Insulation resistance: 500MΩ MIN@100V DC  
 1.5 Voltage proof: DC1000V AC 700V RMS 60Hz, 1MIN

2. Performance: ISO11801 Class Ea

3. Durability: RJ45 750 cycles min.

IDC life: 200 times min.

4. Applicable product:

Solid cable: AWG26/1~23/1, wire diameter from 0.9~1.6mm

5. Storage temperature: -40°C~70°C

Operation temperature: -10°C~60°C

RoHS (2011/65/EU) AND (2015/863/EU) and REACH Compliant

⑥	Dust protection	PC Black	1	
⑤	IDC housing	PC, colour:white color codes printing two wirings of 568A /B	1	
④	IDC terminal	Phosphor bronze with tin plated,suitable for 23~26AWG cable	8	
③	RJ45 Jack	Shielded RJ45 8P8C, gold plated pin	8	
②	PCB	1.2MM	1	
①	SHELL	Zinc alloy/sivler	1	
NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS

NAME.	VALUE Field Plug, Cat.6A , shielded, short screw, toolless		
Item no.	26.99.0374		
	MAPE	TOLERANCE	
		X. ±1.00	
		X.X ±0.50	
	DRAW BY	SCALE	MM
		PAGE	1/1

**SECOMP**