

SAT antenna cable

F-coaxial cable with a shielding rating of > 95 dB

Noise free television reception is primarily a question of the right material. This coaxial cable is specifically designed to satisfy demanding requirements in high-definition television formats. Thanks to two layers of signal shielding, pure materials, and precise processing, it transfers the HDTV and DVB signals without any loss to the receiver. Therefore, you can be sure that you get the experience exactly as it was meant to be.

- pure copper conductor and 2-way shielding for clear signal quality
- particularly suitable for digital satellite TV
- 24-Karat gold plated contacts for minimum transfer resistances

Specifications

Connections

Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	F-connector
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	F-connector
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

cable

Type:	Round cable
Length (m):	1 2 3 5 7.5 10 15 20
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	1 x 0.65
AWG:	22
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil
Type of 2nd shielding	Copper braid 96 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.0
Ferrite core:	on both sides
Ferrite core diameter (mm):	14.0
Kink protection:	on both sides

Signal transmission


Transmission modes:	DVB-S
Shielding rating (dB):	> 95
Characteristic impedance (Ω):	75

General


Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10



Cross section

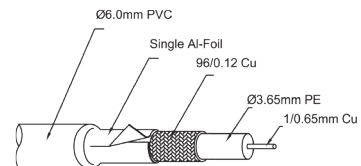









Wiring diagram



●
●
●
10 Years Warranty
OFC
24 Carat Gold
2x
 Designed in Germany | High-Quality Assurance | 99,99% Oxygen Free Copper | Anti Resistance Connections | Cable Shielding

SAT antenna cable

F-coaxial cable with a shielding rating of > 95 dB

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70388	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 703881
70390	2.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 703904
70391	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 703911
70392	5.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 703928
70393	7.50	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 703935
70394	10.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 703942
70396	15.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 703966
70397	20.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 703973

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany