

Stereo audio cable

cinch coaxial cable for powerful stereo sound

When you value good sound, you will need the right audio cable. Because electro-magnetic interactions can easily affect sensitive audio signals, multiple shielded cables assist subtle pulses to be undistorted up to the amplifier. Pure materials, and precise workmanship render additional support.

- double mono design for clear channel separation
- 50 Ω defined characteristic impedance
- 24-Karat gold plated contacts for minimum transfer resistances

Specifications

Connections

Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	2 x RCA plugs (RCA)
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	2 x RCA plugs (RCA)
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

cable


Type:	Round cable
Length (m):	0.5 1 2 3 5 7.5 10 15 20
Inner conductor material:	OFC (sauerstofffreies Kupfer)
Inner conductor diameter (mm):	25 x 0.120
AWG:	23
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil
Type of 2nd shielding	Copper braid 48 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	7.5
Kink protection:	on both sides

Signal transmission


Transmission modes:	analog audio signals
Capacitance (pF):	155
Characteristic impedance (Ω):	50

General

Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10

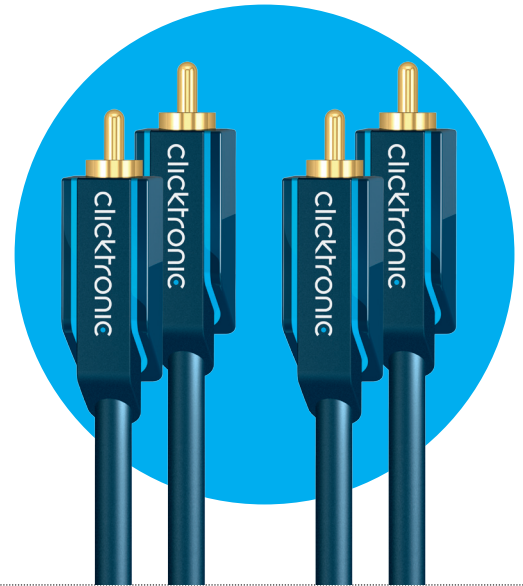

Cross section

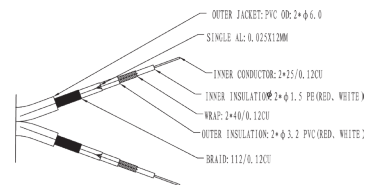










Wiring diagram



				
Designed in Germany	High-Quality Assurance	99,99% Oxygen Free Copper	Anti Resistance Connections	Cable Shielding

Stereo audio cable

cinch coaxial cable for powerful stereo sound

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70376	0.50	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 703768
70377	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 703775
70379	2.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 703799
70380	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 703805
70381	5.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 703812
70382	7.50	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 703829
70383	10.0	Single carton: 185 x 180 x 70 Master carton (16 cartons): 400 x 300 x 400	Single carton: XX Master carton: XX		4 040849 703836
70385	15.00	Single carton: 185 x 180 x 70 Master carton (16 cartons): 400 x 300 x 400	Single carton: XX Master carton: XX		4 040849 703850
70386	20.00	Single carton: 370 x 185 x 85 Master carton (6 Kartons): 400 x 300 x 400	Single carton: XX Master carton: XX		4 040849 703867

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany