

S-video cable

flexile connection cable for demanding users

Every single image is virtually noiseless with true color: With this, you will get the most out of you system. Small wonder, because the cleanly separate transmission of brightness (luminance) and color information (chrominance), as well as multiple layers of signal shielding, pure materials, and precise processing, no detail remains hidden.

- 75 Ω defined characteristic impedance
- pure copper conductor and 2-way shielding for clear signal quality
- 24-Karat gold plated contacts for minimum transfer resistances

Specifications

Connections

Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	Mini-DIN connector (4-pin)
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	Mini-DIN connector (4-pin)
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

cable

Type:	Round cable
Length (m):	1 2 3 5 7.5 10 15 20
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	9 x 0.120
AWG:	27
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil + drain
Type of 2nd shielding	Copper braid 64 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.5
Kink protection:	on both sides

Signal transmission

Transmission modes:	analog video signals
other supported standards:	Brightness (luminance), color (chrominance)
Characteristic impedance (Ω):	75

General

Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10




Mini-DIN connector (4-pin)




Mini-DIN connector (4-pin)



Cross section

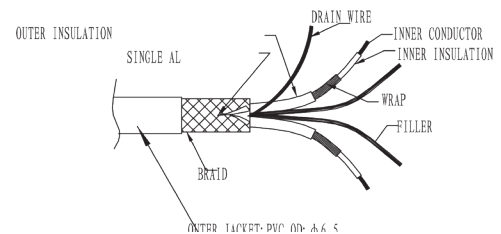



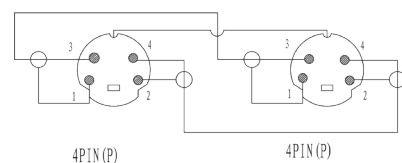





Wiring diagram



	10 Years Warranty	OFC 99,99% Oxygen Free Copper	24 Carat Gold Anti Resistance Connections	2x Cable Shielding
Designed in Germany	High-Quality Assurance			

S-video cable

flexible connection cable for demanding users

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70432	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 704321
70434	2.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 704345
70435	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 704352
70436	5.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 704369
70437	7.50	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 704376
70438	10.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 704383
70440	15.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 704406
70441	20.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 704413

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany