


Conn.1 HDMI A Type Male

Conn.2 HDMI A Type Male

PIN Assignment

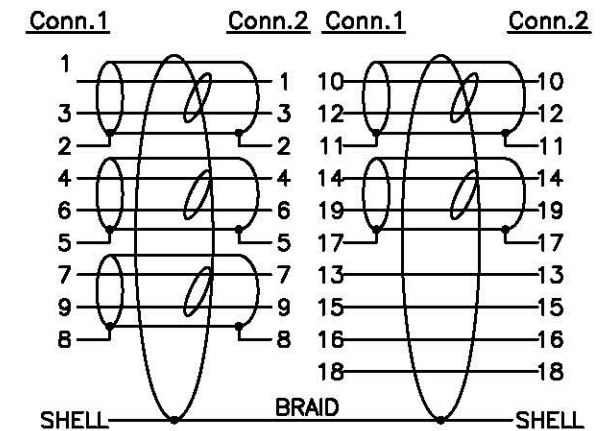

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 5 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:300V DC/10ms

12	W*L=13*100MM Label MRAK:HDMITM HIGH SPEED with ETHERNET...HIGH SPEED HDMI CABLE WITH ETHERNET	1	PCS
11	Ni-plaing Cable Clip OD:7.3mm YB07080702	2	PCS
10	HDMI 20# BLACK ABS Cover	2	PCS
9	HDMI M Transparent Dust Cover	2	PCS
8	45P BLACK PVC	20	G
7	LD-PE Transparent	6	G
6	Thin Black heat shrinkable TUBE OD:1.5*16mm*2PCS	0.032	M
5	Thin Black heat shrinkable TUBE OD:1.0*10mm*10PCS	0.1	M
4	Thin Black heat shrinkable TUBE OD:2.0*10mm*10PCS	0.1	M
3	HDMI 20# Model Aluminum Cover Colour:Golden yellow Laser etching logo	2	PCS
2	HDMI AM 19P SOLDER TYPE,GOLD PLATED,BLACK INSULATION,SHELL PLATED G/F	2	PCS
1	UL20276 (7/0.127T*1PR+EAM)*5C+7/0.127T*4C+AEB (16*5/0.12 50%AL) OD:7.3MM BLACK++BLACK/GOLD web(32/3/0.2MM)	7.5	M
NO.	DESCRIPTION	Q'TY	UNIT

REV.	ECN NO.	DESCRIPTION	DATE	HANDLE
Unit : mm		SECOMP		
.X	.015 .30			
.XX	.010 .10			
DRAWN BY		Item no. 11.04.5504		
CHECK BY		ROLINE GOLD HDMI High Speed Cable w/Ethernet, A-A, M/M, 7.5m		
APPD BY		SCALE	NONE	DRAWING NO.:
		UNIT	MM	
		DATE	15.06.04	REV. A01
				1/1